ECOFIT

Data sheet

For professional use only. Please refer to the conditions of use of our catalogue.



Ind. c - Revision : 04-2005

4GDF55 160x160L P/N R10-03

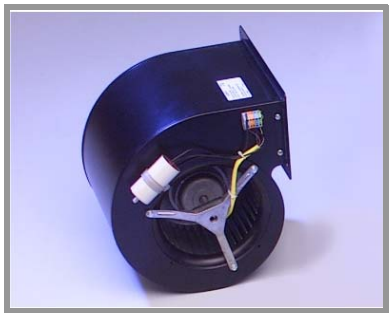

Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	Wa	A	µF	m³/h	RPM	dBA	⟲	Min / Max
230	50	164	0,72	5,0	1 005	1 245	58	L	-20°C / +50°C
230	60	216	0,94	5,0	1 080	1 335	59	L	-20°C / +50°C

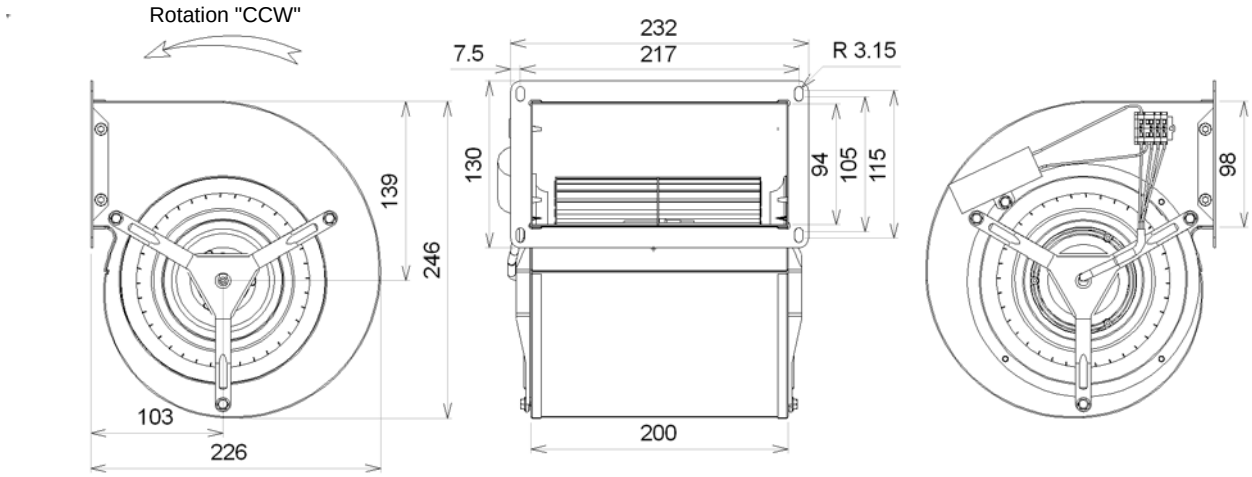

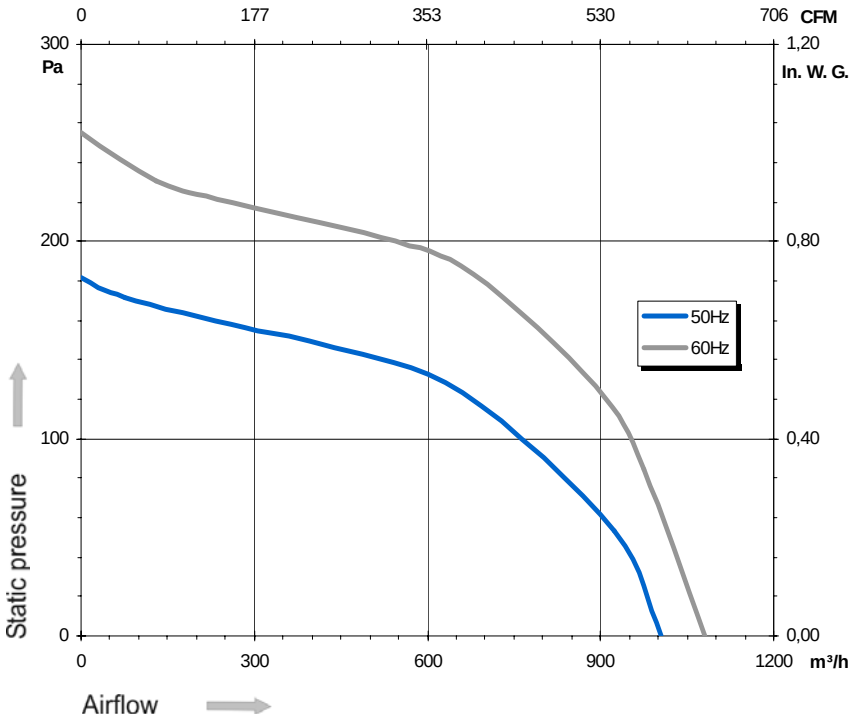

- Ball bearing
- Class F, thermally protected
- IP54 protection
- G2.5 balancing
- Ring : black paint
- Galvanized steel impeller
- Capacitor fixed on the scroll and wired to a WAGO Connector

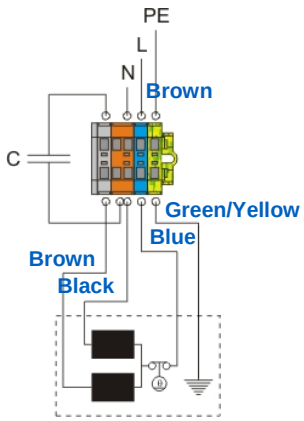

Capacitor for 50Hz	Capacitor for 60Hz	Zinc Coated
-	-	21291-0

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.

ECOFIT - BP 8 / F-41101 VENDÔME Cedex / ☎+33 (0)2 54 23 14 54 / +33 (0)2 54 72 22 73 / http://www.ecofit.com / e-mail : info@ecofit.com